

VSAL 20




Atex-Certified Extract Fan High Pressure

Produced completely by injection moulding. Antistatic polypropylene housing adjustable to 8 positions. High-performance antistatic polypropylene impeller with forward curved blades, statically and dynamically balanced. Gaskets from corrosive material providing protection against shaft/case leakage. Nylon support stool for B3/B5 motors. Stainless steel external assembly fittings. ADPE motor, ATEX CERTIFIED II 2G: Ex-d IIB, Ex-d IIC, T4 or higher, three-phase, single-phase adjustable, at two speeds with IP55 protection.

VSAL 20

Q m ³ /h	Ht mmH ₂ O	Hs mmH ₂ O	kW	HP	g/min rpm	dB (A)	kg Ex-d
250	27	23	0,25	0,35	1450	60	16
350		19					
400		15					
450	105	92	0,55	0,75	2900	67	21
550	108	89					
720	109	76					
800	105	63					

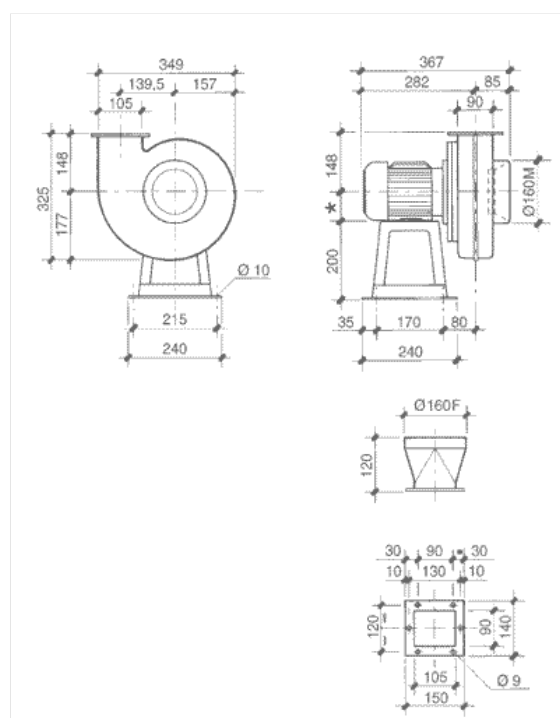

* variabile secondo motore
63-71

* variable depending on motor
63-71

VSAL 25




Atex-Certified Extract Fan High Pressure

Produced completely by injection moulding. Antistatic polypropylene housing adjustable to 8 positions. High-performance antistatic polypropylene impeller with forward curved blades, statically and dynamically balanced. Gaskets from corrosive material providing protection against shaft/case leakage. Nylon support stool for B3/B5 motors. Stainless steel external assembly fittings. ADPE motor, ATEX CERTIFIED II 2G: Ex-d IIB, Ex-d IIC, T4 or higher, three-phase, single-phase adjustable, at two speeds with IP55 protection.

VSAL 25

Q m³/h	Ht mmH ₂ O	Hs mmH ₂ O	kW	HP	g/min rpm	dB (A)	kg Ex-d
400	40	37	0,25	0,35	1450	63	19
720	42	32					
800	41	29					
720	160	150	1,5	2	2900	72	32
900	170	154					
1100	178						
1500	170						

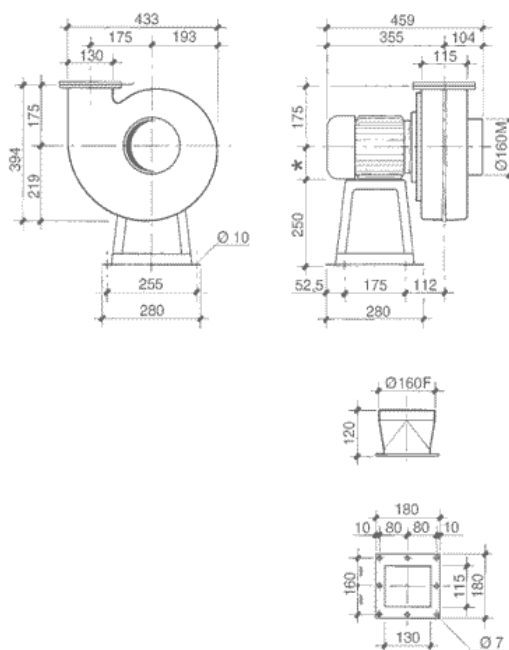

* variabile secondo motore
71-90

* variable depending on motor
71-90


VSAL 30



Atex-Certified Extract Fan High Pressure

Produced completely by injection moulding. Antistatic polypropylene housing adjustable to 8 positions. High-performance antistatic polypropylene impeller with forward curved blades, statically and dynamically balanced. Gaskets from corrosive material providing protection against shaft/case leakage. Polypropylene support stool for B3 motors. Stainless steel external assembly fittings. ADPE motor, ATEX CERTIFIED II 2G: Ex-d IIB, Ex-d IIC, T4 or higher, three-phase, single-phase adjustable, at two speeds with IP55 protection.

VSAL 30							
Q m ³ /h	Ht mmH ₂ O	Hs mmH ₂ O	kW	HP	g/min rpm	dB (A)	kg Ex-d
720	59	53	0,55	0,75	1450	69	31
900	63	54					
1450	56	34					
1450	232	210	3	4	2900	80	51
1600	240	214					
2000	250	210					
2300		196					

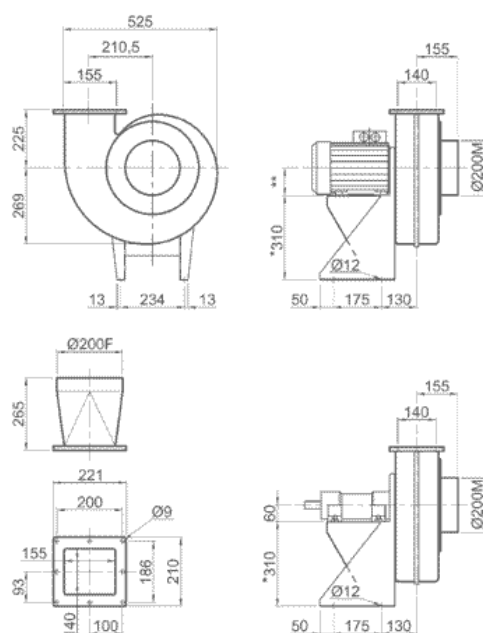

* Questa quota è differente con rotazione RD/LG 270

* This dimension is different with rotation RD/LG 270

** Questa quota dipende dalla grandezza del motore installato min. 80 max. 100

** This dimension depends on the motor size installed min. 80 max. 100